


## 1852 Utility Grade Aluminum Frame Walk Doors

### FEATURES:

- Pre-hung universal 3-1/2" jamb is standard
- Door may be installed right or left hand, swing in or out
- Optional J trim header for finishing the exterior
- Universal header and threshold
- Available in steel, aluminum and fiberglass door skin
- Stainless steel hinges standard
- Optional snap cap header for improved weather seal
- Available options include: panic prep, closer prep, deadbolt prep and special blocking for farm door latches and cane bolts
- An economical and durable design for agricultural, industrial and non-residential buildings
- Built to take years of punishment and still remain appealing to the eye

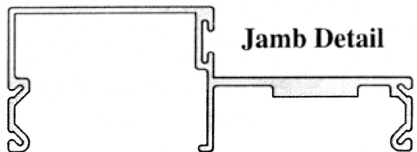

# 1852 Utility Grade - Aluminum Frame Walk Doors




The original universal swing utility door, with optional snap cap header, allows single door to meet a wide variety of building requirements.

Design is compatible with all types of industry standard accessories, including panic hardware, door closers and all types of locksets.

Options and accessories can be factory installed to reduce job site hassles and errors.

Versatile design available in custom sizes and configurations to meet a wide variety of applications.



## 1852 Utility Grade Aluminum Frame Walk Door Specs

SKIN TYPE: Steel, Aluminum, Fiberglass

PANEL THICKNESS: 1-5/8"

PANEL TYPE: Edged Insulated

JAMB FINISH: Mill, White or Brown

HINGES: 4" x 4" Stainless Steel

JAMB DEPTH: 3-1/2"

Door Type	Actual Unit Size		
2868	33-9/16"	x	81-3/4"
3060	37-9/16"	x	73-3/4"
3068	37-9/16"	x	81-3/4"
3070	37-9/16"	x	85-3/4"
6068	74-3/16"	x	81-3/4"
6070	74-3/16"	x	85-3/4"

